



DIRECT VENT GAS CAST IRON STOVES  
HEAT BEAUTIFULLY





Intrepid® Direct Vent Stove in Classic Black

*beauty* + QUALITY

Since 1975 Vermont Castings has been handcrafting beautiful, efficient heating products right in the heart of Vermont. Now with our direct vent gas stoves, you can get the same beautiful craftsmanship, timeless styling, and furniture quality finish without the hassle and mess of a wood stove.

# YOUR HOME. YOUR WAY.

The features you want in the size you need. With three sizes, five models and four finishes, you are sure to find a Vermont Castings direct vent gas stove that is just right for your home.

## RADIANCE®

The largest of our direct vent gas stoves, capable of heating up to 1500 square feet. Standard features include realistic split oak logs and ceramic burner to ensure superior flame movement and realistic ember bed. Choose the Total Signature Command model for ultimate comfort and luxury.\*

## STARDANCE®

A medium sized stove, perfect for heating up to 1000 square feet. With 4" clearances from back and sides, this stove is a great option for tight installations. Control the stove from anywhere in the room with the Total Signature Command model.\*

## INTREPID®

Small in size but rich in cast iron detail, the Intrepid direct vent stove delivers reliable and efficient gas heat and will take the chill off any room. Available in a manual standing pilot configuration.

### CONVENIENT WARMING SHELVES

Stylish yet practical, warming shelves beautifully accent the stove's bold styling. Use them to warm mittens on a cold winter day.



WARMING SHELVES

### EASILY BLEND WITH YOUR DECOR

Available in three beautiful enamel colors and classic black.



Stardance® Direct Vent Stove in Majolica Brown

### Safety First

Because gas stoves become hot to the touch, all Vermont Castings direct vent stoves come standard with a certified safety barrier.



\*Radiance and Stardance are also available in a manual standing pilot model.

## Discover the Convenience of Exclusive Total Signature Command®

Found on the Radiance and Stardance, the Total Signature Command models provide ultimate control of your stove with intuitive technology at your fingertips.

### Featuring:

- Smart Mode® thermostat automatically maintains desired temperature
- Variable three-speed blower
- TSFSC full function touch screen remote control
- Automatic, uninterrupted battery backup
- ON/OFF 3-step variable flame height adjustment
- Standing pilot selection option
- Memory shut off remembers your favorite setting



# VERMONT CASTINGS DIRECT VENT GAS STOVES

	RADIANCE		STARDANCE		INTREPID INDVR
	Total Signature Command RADVTSC	Standing Pilot RADVT	Total Signature Command SDVTSC	Standing Pilot SDDVT	
Actual	Large (31"W x 28"H x 18¼"D)		Medium (25½"W x 26¾"H x 14½"D)		Small (21¼"W x 24¼"H x 13⅝"D)
Heating Capacity	Up to 1,500 sq. ft.		Up to 1,000 sq. ft.		Up to 600 sq. ft.
BTUs/hr	25,000 - 38,000 (NG) / 25,000 - 36,000 (LP)		20,000 - 28,000 (NG & LP)		12,500 - 18,500 (NG) / 12,000 - 16,000 (LP)
Burner	FireCast Ceramic		FireCast Ceramic		FireCast Ceramic
Ignition System	Electronic with Standing Pilot Option	Manual Standing Pilot	Electronic with Standing Pilot Option	Manual Standing Pilot	Manual Standing Pilot
Color	Classic Black, Bordeaux, Biscuit, Majolica Brown		Classic Black, Bordeaux, Biscuit, Majolica Brown		Classic Black, Bordeaux, Biscuit, Majolica Brown
Remote	Standard	Optional	Standard	Optional	Optional
Fan	Standard	Optional	Standard	Optional	Optional
Warming Shelves	Optional		Optional		Optional
Safety Barrier	Standard		Standard		Standard
Venting	Top		Top		Rear
Steady State Efficiency	82%		81%		80%
Canadian P4 Efficiency	66%		64.6%		68%
AFUE (D.O.E.)	68.4%		66.5%		76.5%
Design Certified	CSA		CSA		CSA


NOTE: Square foot heating capacities are approximations only. They will vary depending upon the level of insulation, climate, house design, ceiling height, ambient outside temperatures and how the appliance is operated.

## CLEARANCES

Minimum clearances to combustible materials in inches. Maintain clearance (empty space) between combustible materials and the heater as specified below for the appropriate model.

### INSTALLATION: Normal Clearance Requirements

	Radiance	Stardance	Intrepid
(A) TO CEILING	72" (1830 mm)	72" (1830 mm)	72" (1830 mm)
(B) TO SIDE WALL	6" (150 mm)	4" (102 mm)	2" (51 mm)
(C) TO REAR WALL	4" (102 mm)	4" (102 mm)	4" (102 mm)
(D) MAX ALCOVE DEPTH	48" (1220 mm)	48" (1220 mm)	48" (1220 mm)
(E) TO SIDE WALL CORNER	6" (150 mm)	4" (102 mm)	2" (51 mm)

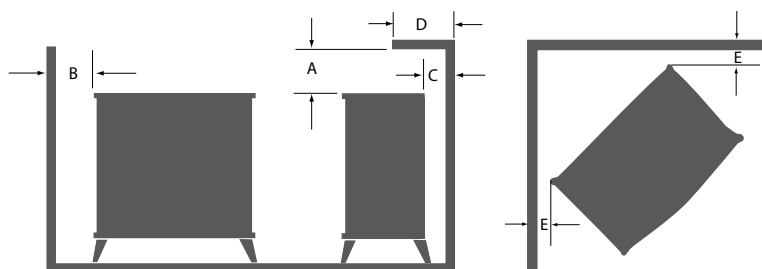

Vermont Castings direct vent gas stoves must be installed on rigid flooring. When the heater is installed directly on any combustible surface other than wood flooring, a metal or wood panel extending the full width and depth of the unit must be used as the hearth.



vermontcastings.com



The Firebird  
1808 Espinacitas Street  
Santa Fe, NM 87505

thefirebird.com



Warning: Hot glass will cause burns.  
Do not touch glass until cooled.  
Never allow children to touch glass.

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. ©2016 Hearth & Home® Technologies® VMT-1002-0416